

Installation Instructions

Model D-800

Loading Dock Company (LDC) Ltd
1090 Aerowood Drive, Unit 2-4 Mississauga,
Ontario L4W 1Y5
www.loadingdockcompany.com



LOADING DOCK COMPANY (LDC) LIMITED

Limited Warranty for all Seals, Shelters, & Inflatables

LDC warrants to the purchaser that, for a period of three hundred and sixty-five (365) days from date of shipment, all seals, shelters and inflatables shall be free from defects in the workmanship and materials. As a condition to making a warranty claim, LDC must be notified in writing of any warranty claim within **ten (10) working days** of the Purchaser identifying the defect and LDC shall be entitled to inspect the defect prior to removal or alteration. If the warranty claim is approved by LDC the defective part shall be returned by the purchaser - **transportation charges pre-paid** – within fifteen (15) days of the approval and if, upon further examination by LDC it is ascertained that said equipment or part thereof is defective in workmanship or material, LDC will deliver to the purchaser – without charge - F.O.B Mississauga, Ontario, parts of proper workmanship and material in exchange for any parts so found to be defective, and the total liability of LDC is limited to said exchange. No other costs or damages of any kind will be covered by LDC. This warranty shall **not** apply if in the discretion of LDC there was improper or inadequate installation, improper or inadequate maintenance, any service or adjustment by the customer, or any equipment was repaired or altered by other than LDC or its authorized service representatives. This limited Warranty will **not** apply where the purchaser has not signed off on an **approved LDC Specification Sheet and Survey Sheet**.

Under no circumstances is the purchaser entitled to set-off a warranty deduction against a payment otherwise owed to LDC until such warranty claim has been approved and credit has been issued by LDC. The warranty is invalidated if a set-off is claimed prior to approval of the warranty claim.

These warranties are the only warranties given by LDC and there are no other warranties, expressed or implied, at law or in equity whatsoever, including without limitation: warranties of merchantability and fitness for particular purpose, any other representations to the purchaser, verbal or otherwise. LDC shall not be responsible for any obligations or liabilities other than workmanship and materials, including liability for incidental and consequential damages. No person, whether employed or an agent of LDC or not, is authorized to give any other warranties or assume any liability on behalf of LDC unless made or assumed in writing by LDC.



WARNING!!!

Post safety warning and barricade work area, at dock level and ground level to prevent unauthorized use of the dock position while service work is being performed.

Parts List

- ☐ 1 Head Frame
- ☐ 2 Side Frames


Hardware – Galvanized

- ☐ 15 – 5/8" x 4" Sleeve Anchors
- ☐ 30 Roofing Nails
- ☐ 1 Installation Instruction

Instructions:



1. Marking and mounting locations for side frames.

Measure one half of the top frame length. From the center line of the door opening (top & bottom) mark out the location of the outside of the side as shown in **Figure 1**. Repeat for the other side frame location.

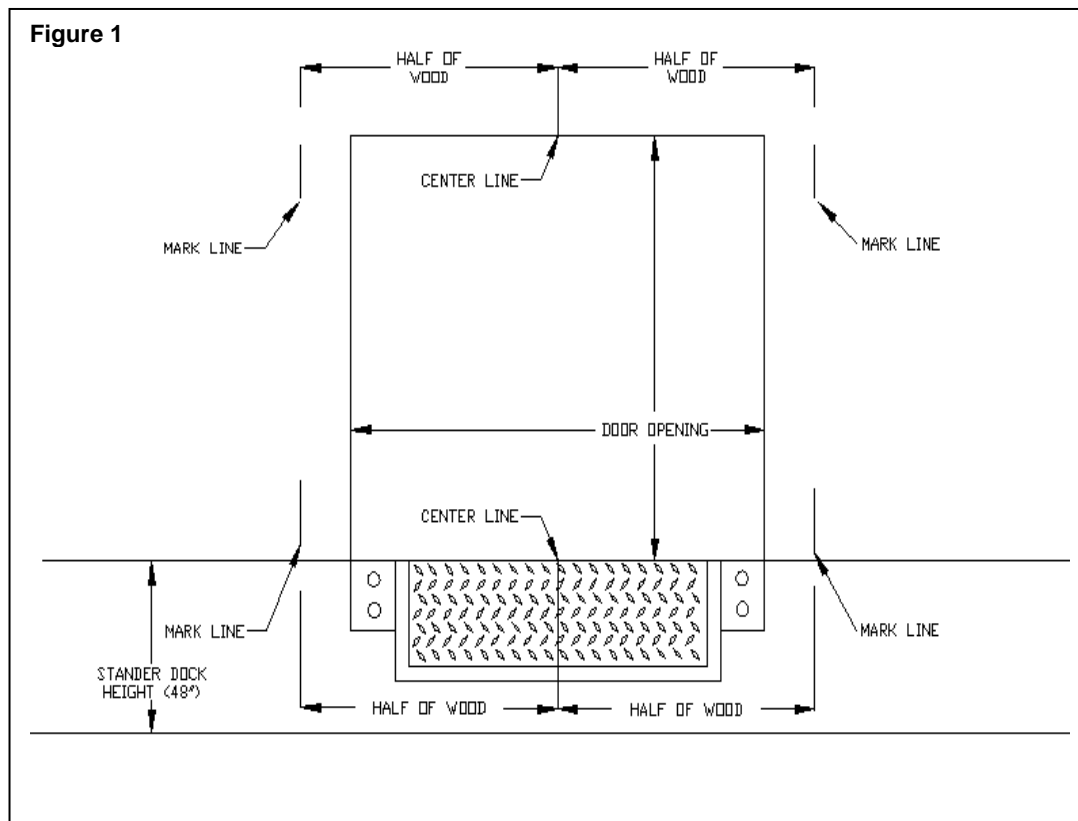

2. Attaching side frames to the wall.

Place one vertical frame in place lining up the outside edge of the side frame with the marks as shown in **Figure 1**. Ensure that the side frames are plumb and sit flush with the building wall. Also make sure the bottom of the side frame sits flush with the outside edge. Fasten each frame to building wall using (5) 3/8" x 4" sleeve anchors. **Figure 2**

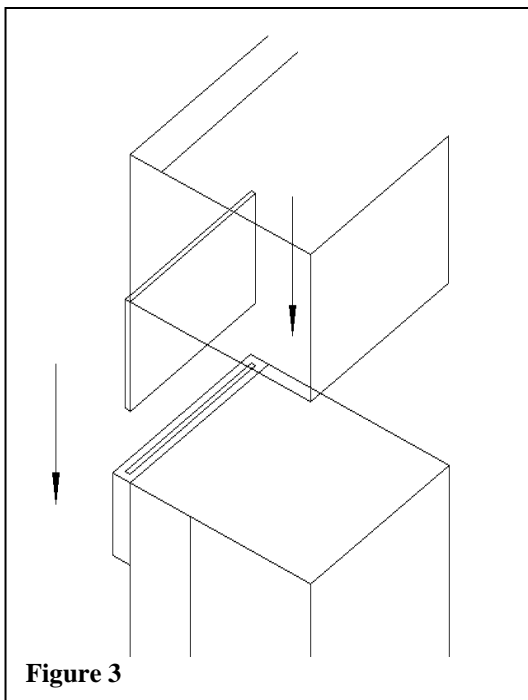
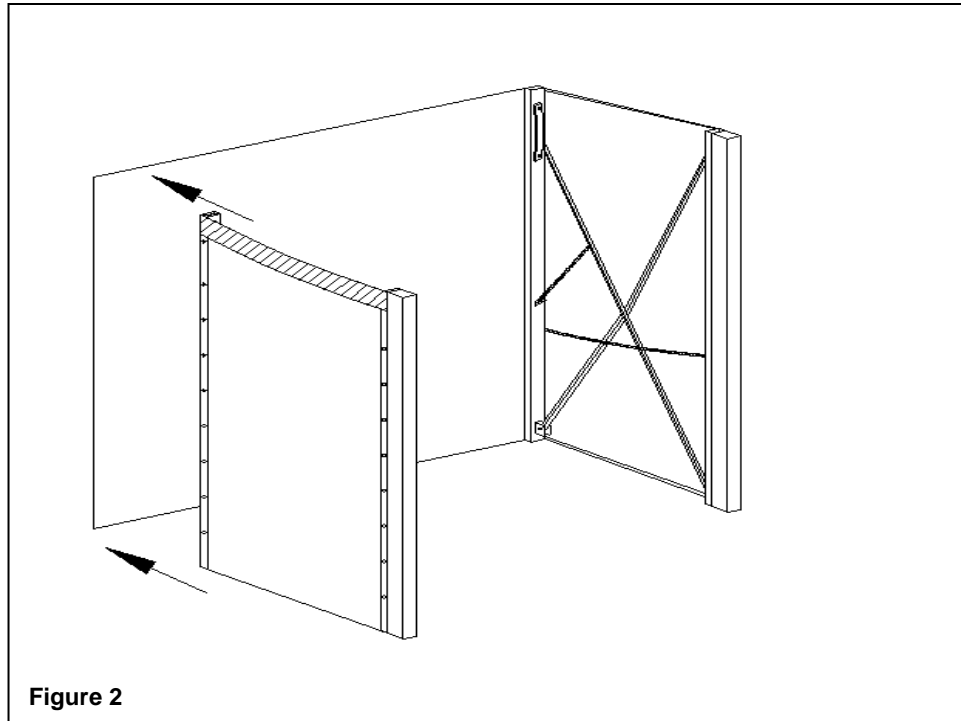


Note: Perimeter cover will come pre-attached to top frames. Same steps apply to head frame as sides.

3. Mounting top frame to wall and side frames.

Place head frame on top of vertical sliding the flat bar on the head frame into the top side frames.

Figure 3

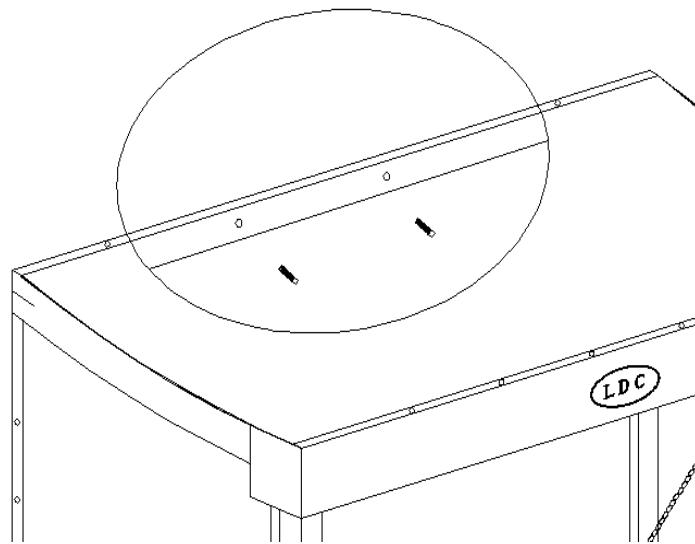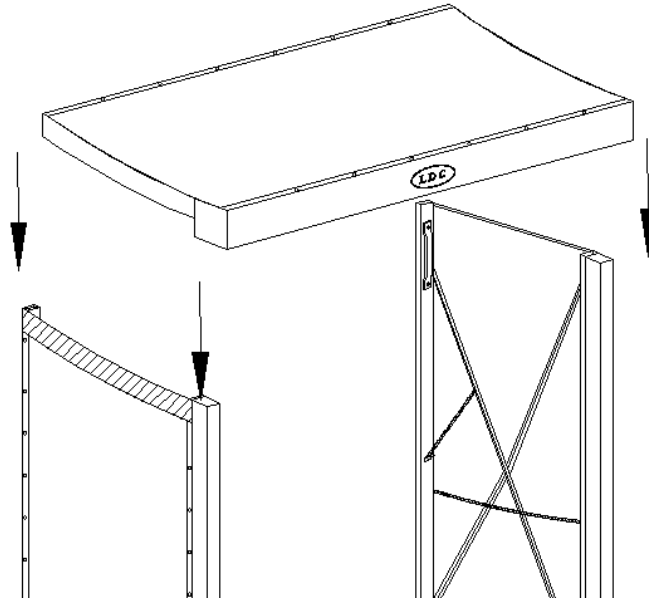

Note: Fasten the head frame to the wall using five (5) 3/8" x 4" sleeve anchors.

4. Caulking.

Caulk across the top of the head pad using a good quality caulking.

5. Clean up around dock area when complete.